




# LOW TEMPERATURE THERMOSTATS

Type R



## APPLICATIONS

The low temperature thermostats can be installed in refrigeration appliances, ice machines, double-doored refrigerators, cold storages

## TECHNICAL DATA

### Switch

The arrow indicates the temperature rising.

The sign C, L, H, 3, 4, 6 are terminals; the signes:

C, L, H are the terminals for the model **Type S**

3, 4, 6 are the terminals for the model **Type R**

Type S

### Electrical data

Rating voltage 250V (AC250V)

Frequency 50Hz/60Hz

Current 5(4)A

20 A


16(4) A

Adjustable temperature +35°C -36°C

Ts > Tb

Ts: the temperature of the main-body

Tb: the temperature of the detector

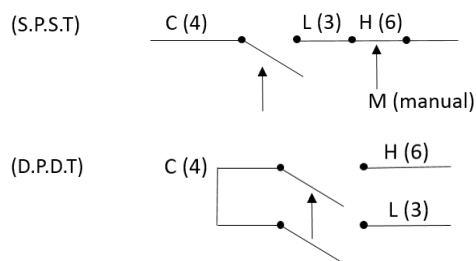

### SPECIAL SERIES

On request and for sufficient quantities, Milano Componenti also develops special versions to the client's design.

		Power factor COS Φ	High current	Middle current		Small current	
			AC125/250	AC125	AC250	AC125	AC250
Without inductance		1	1-16	1-8	0.5-5		
Inductive load	Normal	0.75	1-16	1-6	0.5-4	0.02-2	0.02-1
	Starting	0.45	1-64	1-24	0.5-16	0.02-8	0.02-4
Applicable terminal number			250#	250# 205# 187#	250# 205# 187#		